




## 10 KG FRONT LOAD WASHER AND STACKED GAS DRYER

### Features and Benefits

- Low water consumption of only 44.3 litres per wash, with full wash completed in 30 minutes.
- Energy saving 'High Speed Extract' spin cycle of 1,200 rpm producing 'G' forces in excess of 440 for greater water removal, resulting in reduced drying times and associated energy savings.
- 100% front service gas dryer for fast, efficient drying.
- Electronic coin mechanism will accept \$1, \$2 or a token while rejecting foreign currency, with the vend price adjustable in seconds with no hardware changes required.

### SPECIFICATIONS

DIMENSIONS	
CAPACITY	10 kg washer, 9 kg dryer
WIDTH	683 mm
DEPTH	704 mm
HEIGHT	1,986 mm
NET WEIGHT	177 kg
OPERATION	
CYCLES	9 cycles, 3 soil levels
CYCLE LIGHTS	Yes
CYCLE TIME	26 - 30 min
CONTROLS	Touch push button controls
ACTIVATION	Card, Token, Electronic coin drop
WATER TEMPERATURE	Cold, Warm, Hot
MOTOR WASHER	1 hp, variable speed
SPIN SPEED WASHER	500 - 1,200 rpm, variable speed
WATER USE WASHER	44.3 litres / wash
HEAT INPUT DRYER	27 mj natural gas or LPG
HEAT INPUT (DRYER)	
INNER BOWL WASHER	Stainless steel
OUTER BOWL WASHER	Stainless steel
OUTER CASING	Steel
DRUM DRYER	Galvanized steel

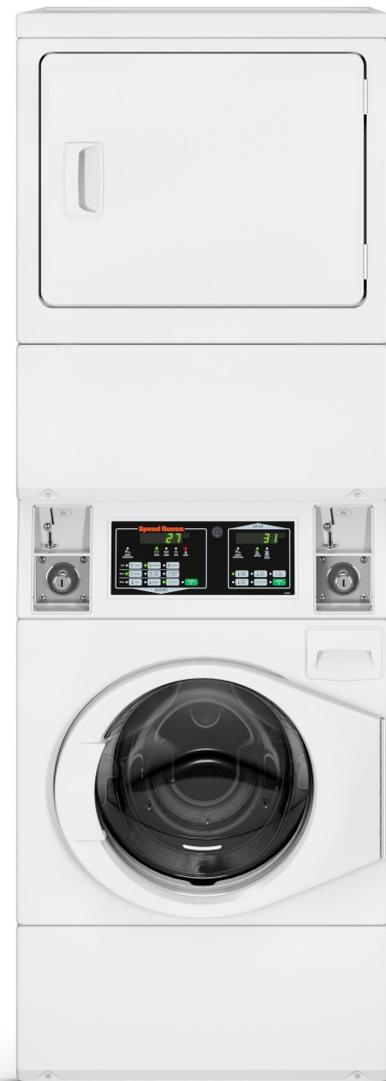

# STGNXA Commercial Washer/Dryer



## TECHNICAL SPECIFICATIONS

### UTILITIES WASHER

10 AMP SINGLE PHASE 240 V 50 HZ
10 AMP CIRCUIT BREAKER
1.8M POWER LEAD
HOT AND COLD WATER SUPPLY
1.2 M HOT AND COLD WATER HOSES SUPPLIED
WATER SUPPLY HOSE TAP ENDS 3/4 BSP THREADS
MAX HOT WATER CONSUMPTION 18.9 LITRE / CYCLE
MAX WATER CONSUMPTION 44.3 LITRE / CYCLE
MAX POWER DRAW 670 W / HR
WATER SUPPLY PRESSURE BETWEEN 20 - 120 PSI
DRAIN: 610 - 914 MM UPSTAND, 50 MM DIAMETER


### UTILITIES DRYER

10 AMP SINGLE PHASE	240 V 50 Hz
10 AMP	Breaker required
1.8 M FLEX	Power Cord
FLUE DIAMETER	102 mm (4 in)
AIR FLOW	85 litres / second
MAX POWER DRAW	4,000 w / hour
OPTIONAL	Right or left side venting

### SHIPPING DIMENSIONS

WEIGHT	189 kg
HEIGHT	2,032 mm
WIDTH	762 mm
DEPTH	864 mm
	1.33 m <sup>3</sup>

A *1678 mm [66.06 in.]	B *1447 mm [56.97 in.]	C 597 mm [23.5 in.]
D 213 mm [8.375 in.]	E 610 mm [24 in.]	F 203 mm [8 in.]
G 391 mm [15.4 in.]	H 59 mm [2.3 in.]	I *938 mm [36.9 in.]
J *371 mm [14.6 in.]	K *1140 mm [44.87 in.]	L *813 mm [32 in.]
M 683 mm [26.875 in.]	N *1986 mm [78.17 in.]	O *1184 mm [46.62 in.]
P 52 mm [2.04 in.]	Q 704 mm [27.73 in.]	R (with door closed) 38 mm [1.5 in.]
S *333 mm [13.1 in.]		

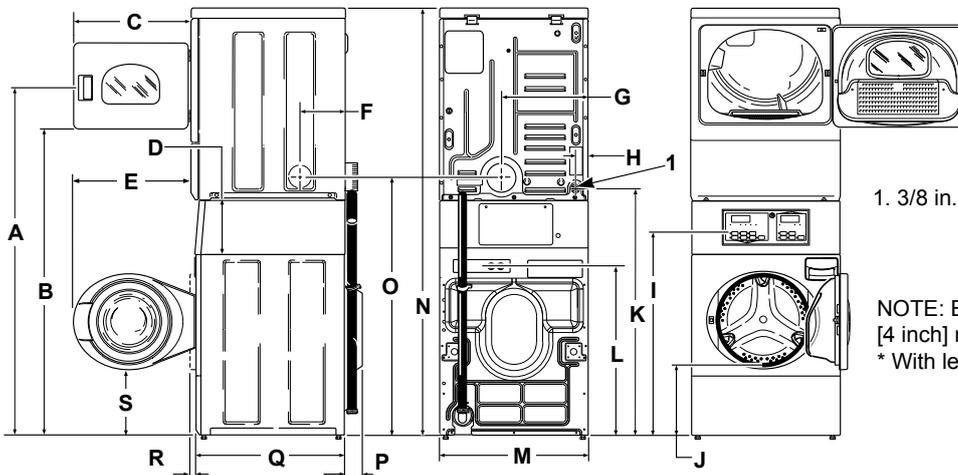

1. 3/8 in. NPT Gas Connection

NOTE: Exhaust openings are 102 mm [4 inch] metal ducting.  
\* With leveling legs turned into base.

### WESTERN AUSTRALIA

7/15 Walters Drive  
Osbourne Park WA 6017  
T: 08 9445 7744  
enquiry@speedqueenwa.com.au

### NEW SOUTH WALES & ACT

245 Rawson Street  
Auburn NSW 2144  
T: 02 9748 2155  
enquiry@speedqueenlaundry.com.au

### SOUTH AUSTRALIA & NT

385-387 Main North Road  
Enfield SA 5085  
T: 08 7095 0336  
sa@speedqueenlaundry.com.au

### QUEENSLAND

2/18 Gravel Pit Road  
Darra QLD 4076  
T: 07 3376 3869 \*Home retail  
qld@speedqueenlaundry.com.au